

VEKTA V2525C



Key Features

- 300mm minimum bend radius
- Even Illumination
- Clip on diffuser for easy installation
- Direct Illumination
- Typical length is 2.5m (longer lengths available on request)
- Other RAL colours available on request
- SELV LED Engine
- Complies with relevant Australian Standards

Compliance



*Cyanosis compliant on request

Colour Options



Code


Example:

V2525C-S0590300DDO10-2400

Profile	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V2525C	S - Surface Mount P - Pendant Wire D - Pendant Rod	05 - 4.8W/m (243lm/m) 10 - 9.6 W/m (486lm/m) 15 - 14.4 W/m (729lm/m) 28 - 28.8W/m (1457lm/m)	80 - CRI>80 90 - CRI>90	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K RGB3 - RGBW 3000K RGB4 - RGBW 4000K	OD - Opal	DO - Non-Dim DA - DALI-Dim SW - Switch-Dim CA - Casambi D4 - DALI RGBW C4 - Casambi RGBW	10 - Black 11 - White 12 - Silver 13 - Gold Bronze CU - Custom	- XXXX mm

Mounting

Surface Mounted (S) Wire Pendant (P)
Rod Pendant (D)

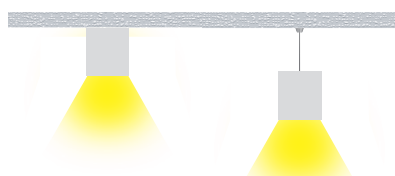

Dimensions

