


Key Features

Optical Systems	Opal Diffused	CCT	2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW
Mounting Type	Surface Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Natural Anodised Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 30W/m 38.4W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20 IP67 ¹


1. IP67 is achieved by using IP67 LED Tape.

Finish colour options




Installation Types

Surface Mounted (S)




Configurations

Standard Length

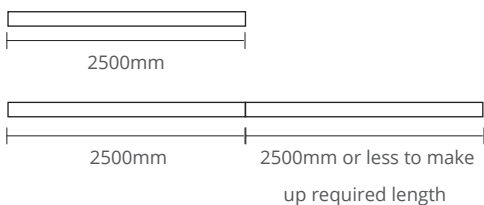

Angle




Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	
Monochrome	CCT 2700K / 3000K / 3500K / 4000K / 5000K / 6500K				
	Ingress Protection (IP) IP20/IP67				
	CRI> 90 / 95				
	Lumens/m (4000K)	425	850	1275	1700
RGB & SINGLE COLOURS	14.4W/m (14)				
	CCT RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP) IP20/IP67				
	CRI> -				
RGBW	19.2W/m (19) *				
	CCT RGBW (3000K/4000K/6000K)				
	Ingress Protection (IP) IP20/IP67				
	Lumens/m -				
Tunable White	19.2W/m (19)				
	CCT 2500K-6000K				
	Ingress Protection (IP) IP20/IP67		IP20		
	CRI> 90		90		
Lumens/m 1680		3360		23W/m (23)	
		38.4W/m (38)		23W/m (23)	
		2500K-6000K		2500K-6000K	
		IP20/IP67		IP20/IP67	
		90		90	
		1680		3360	


* LED option has an on-board constant controller IC with inbuilt temperature control.

Photometrics

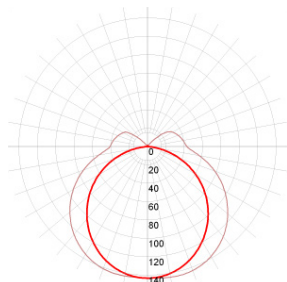

Accessories

Mounting Channel



Code

Example: V2019 - S059027ODD079 - 2500

Code		Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length																
V2019	V2019, IP20	S	Surface Mounted	05	4.8W/m	90	CRI>90	27	2700K	OD	Opal	D0	Non-Dim	10	Black	- XXXX																
V2019IP	V2019, IP65			10	9.6W/m			30	3000K								DA	DALI	11	White												
				14	14.4W/m			35	3500K	D4	DALI RGBW										79	Natural Anodised										
				15	14.4W/m			40	4000K														SW	Switch-Dim	CU	Custom						
				19	19.2W/m			50	5000K																		CA	Casambi				
				20	19.2W/m			65	6500K																				C4	Casambi (TW/ RGB/RGBW)		
				23	23W/m			TW	2500K-6000K																						T2	Tunable White (DALI/)
				30	30W/m			RGB	RGB																							
				38	38.4W/m			RGBW3K	RGBW 3000K																							
								RGBW4K	RGBW 4000K																							
				RGBW6K	RGBW 6000K																											

FOS Lighting reserve the right to change any data without notification