

SPF-LED


LED VANDAL PROOF SURFACE MOUNT



Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- Vandal proof security luminaire.
- Internal body fabricated from 1.2mm steel finished in white powder coat.
- High impact UV stabilized polycarbonate diffuser fixed with tamper-proof screws.
- Impact tested by QUT (Test No 5158).
- IP54 weatherproof version available (WSPF-LED).
- 200mm LED night light available.

Dimensions

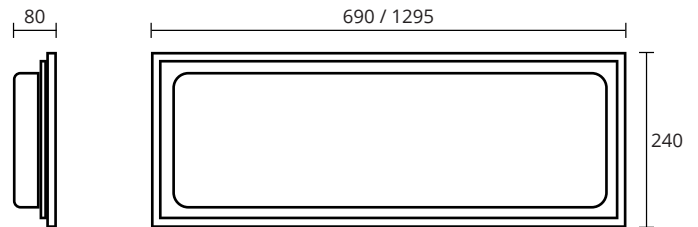

Technical Information

Configurations	Non Dim System wattage	Combined Board Output (lm)	Dimensions (mm)
2x08W	22.20	2440	690x240
4x08W	38.10	4880	1295x240
2x14W	34.34	4400	690x240
4x14W	68.52	8800	1295x240

Code

SPF-LED/2/14/12/40/ND/LED-NL

Product Series		# of boards		Wattage of Boards		Nominal Dimensions		CCT		Driver		LED Night Light	
SPF-LED		2	2 Boards	08	8W	06	600x300	30	3000K	ND	Non Dim	LED-NL	200mm LED
WSPF-LED	(IP54)	4	4 Boards	14	14W	12	1200x300	40	4000K	DALI Switch	DALI Dim Switch Dim		Night Light

See Technical Information Table for configurations options
Specifications subject to change without notice

