


## Key Features


Optical Systems	Opal Diffused	CCT	2700K   3000K   3500K   4000K   5000K   6500K   Tunable White 2500-6500K   RGB   RGBW
Mounting Type	Surface Mounted	Controls	Non Dimming   DALI Dimming   Switch Dimming   Casambi
Finish Options	Textura Black   Textura White   Natural Anodised   Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m   9.6W/m   14.4W/m   19.2W/m   23W/m   30W/m   38.4W/m
CRI	>90 (Standard)   >95 (Optional)	Ingress Protection	IP20

## Finish colour options




## Installation Types

Surface Mounted (S)




## Configurations

Standard Length

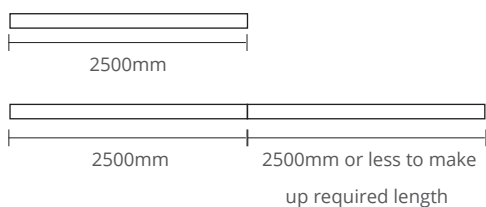

Angle




## Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)
Monochrome	CCT 2700K / 3000K / 3500K / 4000K / 5000K / 6500K			
	Ingress Protection (IP) IP20			
	CRI> 90 / 95			
	Lumens/m (4000K)	425	850	1275
COLOURS	14.4W/m (14)			
	CCT RGB / Red / Green / Blue / Yellow			
	Ingress Protection (IP) IP20			
	CRI> -			
RGBW	19.2W/m (19) *			
	CCT RGBW (3000K/4000K/6000K)			
	Ingress Protection (IP) IP20			
	Lumens/m -			
Tunable White	19.2W/m (19)			
	CCT 2500K-6000K			
	Ingress Protection (IP) IP20			
	CRI> 90			
Lumens/m 1680				


\* LED option has an on-board constant controller IC with inbuilt temperature control.

## Photometrics

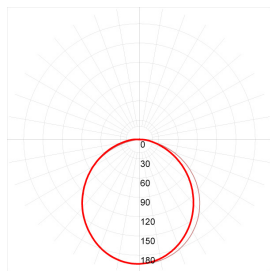

## Accessories

### Mounting Bracket



## Code

Example: V1816 - S059027ODD079 - 2500

Code		Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V1816	V1816, IP20	S Surface Mounted	05 4.8W/m	90 CRI>90 95 CRI>95	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 65 6500K TW 2500K-6000K RGB RGB RGBW3K RGBW 3000K RGBW4K RGBW 4000K RGBW6K RGBW 6000K	OD Opal	D0 Non-Dim DA DALI D4 DALI RGBW SW Switch-Dim CA Casambi C4 Casambi (TW/RGB/RGBW) T2 Tunable White (DALI/)	10 Black 11 White 79 Natural Anodised CU Custom	- XXXX
V1816IP	V1816, IP65		10 9.6W/m						
			14 14.4W/m						
			15 14.4W/m						
			19 19.2W/m						
			20 19.2W/m						
			23 23W/m						
			30 30W/m						
			38 38.4W/m						

# FOS Lighting reserve the right to change any data without notification