

ELL


FIXED RECESSED LED DOWNLIGHT



Key Features

- 50,000 hrs.
- Opal polycarbonate diffuser.
- IC Certification.
- CRI Rating ≥ 80 .
- 150mm and 200mm cutout size.
- LED consumptions of 8W, 12W, 18W, 25W.
- 110 degree beam angle.
- Complete with 1.2m flex and plug.
- Dimmable.

Dimensions

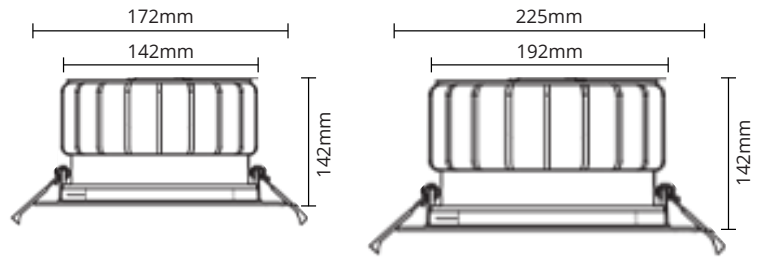

Technical Information

Non Dim Wattage (W)	Colour Temperature	Lumens (lm)	Cutout Fixed (mm)
08	3000K	750	150mm / 200mm
08	4000K 5000K	800	150mm / 200mm
12	3000K	1100	150mm / 200mm
12	4000K 5000K	1200	150mm / 200mm
18	3000K	1650	150mm / 200mm
18	4000K 5000K	1800	150mm / 200mm
25	3000K	2150	150mm / 200mm
25	4000K 5000K	2300	150mm / 200mm

Code

ELL/08/17/30/W

Product Series	Wattage / Dimensions	CCT	Finish
ELL	08/17	8W - 172mm	30 3000K
	08/22	8W - 225mm	40 4000K
	12/17	12W - 172mm	50 5000K
	12/22	12W - 225mm	
	18/17	18W - 172mm	
	18/22	18W - 225mm	
	25/17	25W - 172mm	
	25/22	25W - 225mm	

Specifications subject to change without notice.