


## Key Features

Optical Systems	Opal Diffused	CCT	2700K   3000K   3500K   4000K   5000K   6500K   Tunable White 2500-6500K   RGB   RGBW
Mounting Type	Recessed	Controls	Non Dimming   DALI Dimming   Switch Dimming   Casambi
Finish Options	Textura Black   Textura White   Natural Anodised   Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m   9.6W/m   14.4W/m   19.2W/m   23W/m   28.8W/m   30W/m   38.4W/m
CRI	>90 (Standard)   >95 (Optional)	Ingress Protection	IP20   IP67 <sup>1</sup>


1. IP67 is achieved by using IP67 LED Tape.

## Finish colour options




## Installation Types

Recessed (R)




## Configurations

Standard Length

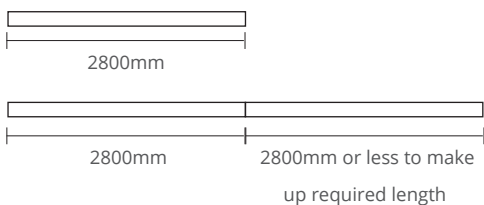

Angle




## Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	28.8W/m (29)
Monochrome	CCT 2700K / 3000K / 3500K / 4000K / 5000K / 6500K				
	Ingress Protection (IP) IP20/IP67				
	CRI> 90 / 95				
	Lumens/m (4000K)	425	850	1275	1700
RGB & SINGLE COLOURS	14.4W/m (14)				
	CCT RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP) IP20/IP67				
	CRI> -				
RGBW	19.2W/m (19) *		23W/m (23)	30W/m (30)	19.2W/m (20)
	CCT RGBW (3000K/4000K/6000K) RGBW (3000K/4000K)				
	Ingress Protection (IP) IP20/IP67 IP20/IP67				
	Lumens/m - - -				
Tunable White	19.2W/m (19)			38.4W/m (38)	
	CCT 2500K-6000K				
	Ingress Protection (IP) IP20/IP67			IP20	
	CRI> 90			90	
Lumens/m 1680 3360					


\* LED option has an on-board constant controller IC with inbuilt temperature control.

## Photometrics

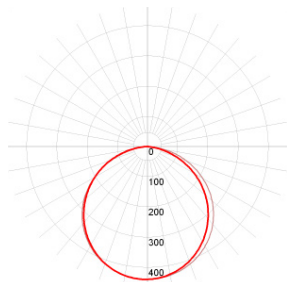

## Accessories

### Mounting Bracket

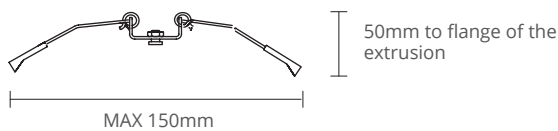

## Code

Example: V3535R - R109027ODD079 - 2500

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V3535R	V3535R, IP20	05 4.8W/m	90 CRI>90	27 2700K	OD Opal	D0 Non-Dim	10 Black	-XXXX
V3535RIP	V3535R, IP76	10 9.6W/m	95 CRI>95	30 3000K		DA DALI	11 White	
		14 14.4W/m		35 3500K		D4 DALI RGBW	79 Natural Anodised	
		15 14.4W/m		40 4000K		SW Switch-Dim	CU Custom	
		19 19.2W/m		50 5000K		CA Casambi		
		20 19.2W/m		65 6500K		C4 Casambi (TW/RGB/RGBW)		
		23 23W/m		TW 2500K-6000K		T2 Tunable White (DALI/)		
		29 28.8W/m		RGB RGB				
		30 30W/m		RGBW3K RGBW 3000K				
		38 38.4W/m		RGBW4K RGBW 4000K				
				RGBW6K RGBW 6000K				

# FOS Lighting reserve the right to change any data without notification