



Key Features

Bending direction & Minimum bend diameter	Horizontal, 80mm	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Natural Anodised (Standard) Textura Black Textura White	Power Supply	Remote Driver
System Warranty	5 Years	Power length	600mm
CRI	CRI >80 CRI >90 ¹	Wattage	5W /m 10W/m 12W/m 13W/m
CCT	2200K 2700K 3000K 3500K 4000K 4500K 5000K 6500K RGB Single Coloured TW	Protection	IP68 IK08

1. MOQ Required


Technical Information

	Monochrome		Tunable	RGB
	5W/m	10W/m	12W/m	13W/m
lm/m	160	260	130+253	30 (R) 110 (G) 30 (B)
Max Run Length (m)	13	10	10	5
Incremental Order Length (mm)	100	100	100	83.3
LED's/m	70	120	120	84

Lumens values based on 4000K, CRI>80


##If the length needs to be adjusted on site, contact FOS Lighting before cutting the product

Photometrics

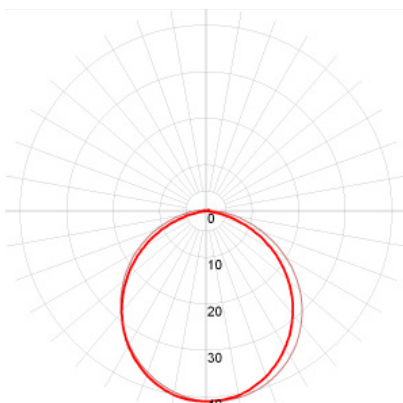


Data values reflect CRI>80, 10w/m, 4000K

Finish colour options




Installation Types

Surface Mounted (S)




Power Locations


Direct Entry




Side Entry Right



Side Entry Left




Bottom Entry




Accessories

* Where necessary dimensions have been rounded up to the closest whole value

Mounting Channel
Standard



Mounting Channel
Anti-Drop



Code

Example:

VHB0817-S-05-80-22-DE-DO-79-5000

Code	Mounting	Power	CRI	CCT	Connector	Driver	Finish	Length
VHB0817	S Surface Mounted	05 05 W/m 10 10 W/m 12 12 W/m 13 13 W/m	80 CRI>80 90 CRI>90	22 2200K 27 2700K 30 3000K 35 3500K 40 4000K 45 4500K 50 5000K 65 6500K RGB RGB TW 2700K - 6000K	DE Direct Entry SL Side Entry Left SR Side Entry Right BE Bottom Entry	D0 Non-Dim DA DALI SW Switch-Dim CA Casambi T2 Tunable White	10 Black 11 White 79 Natural Anodised CU Custom	- XXXX

FOS Lighting reserve the right to change any data without notification