


TDL-LED-ECO


ARCHITECTURAL T-BAR

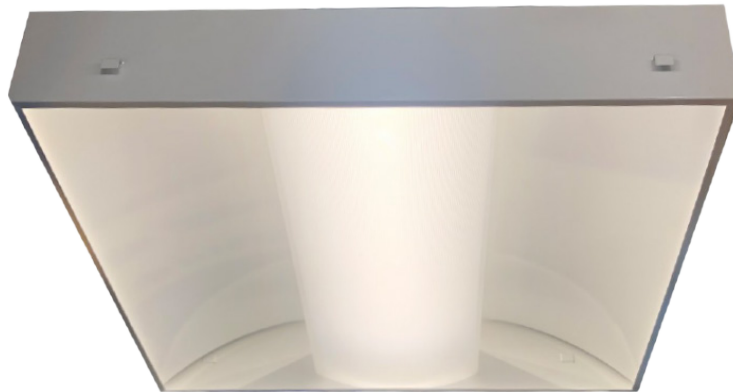

Key Features

- L80 B10.
- Rated 70,000 hours.
- CRI>80.
- SELV.
- High Transmittance white acrylic diffuser, pearl in appearance.
- Powder coated white metal body - other colours available on request.
- Available in Plaster Recessed, Surface Mount, Suspended, T-Bar recessed (38mm Standard T-Bar).
- Available in DALI Dim or Switch Dim.

Dimensions

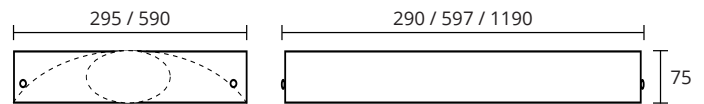

Technical Information

Configurations	Non Dim System wattage	Combined Board Output (lm)	Dimensions (mm)
2x8W	19	2750	597x290, 597x590 & 1190x290
4x8W	38	5500	1190x290
2x14W	34	4900	597x290, 597x590 & 1190x290
4x14W	68	9800	1190x290

Code

TDL-LED-PB/2X14/12X3/K5/40/N

Product Series		# of boards		Wattage of boards		Nominal Dimensions		Diffuser Type		CCT		Driver	
TDL-LED-TB	T-Bar	2	2 Boards	08	8W	6x3	600x300	OP	Lumieo	30	3000K	ND	Non Dim
TDL-LED-PB	Plaster	4	4 Boards	14	14W	6x6	600x600			40	4000K	DALI	DALI Dim
TDL-LED-SM	Surface Mount					12x3	1200x300					SD	Switch
TDL-LED-SUS	Suspended												

Specifications subject to change without notice

