



V1616CR

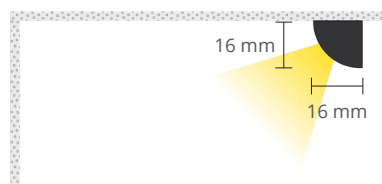

Key Features


Optical Systems	Opal Diffused	CCT	2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW
Mounting Type	Surface Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Natural Anodised Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 30W/m 38.4W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20

Finish colour options

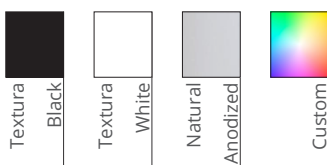


Installation Types

Surface Mounted (S)




Configurations

Standard Length

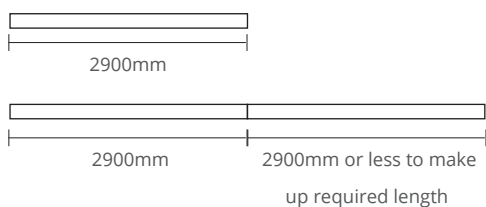

Angle




Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	
Monochrome	CCT				
	2700K / 3000K / 3500K / 4000K / 5000K / 6500K				
	Ingress Protection (IP)				
	IP20				
CRI>					
90 / 95					
Lumens/m (4000K)		425	850	1275	1700
COLOURS	14.4W/m (14)				
	CCT				
	RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP)				
IP20					
CRI>					
-					
Lumens/m		350-410 (RGB)			
RGBW	19.2W/m (19) *		23W/m (23)	30W/m (30)	19.2W/m (20)
	CCT				
	RGBW (3000K/4000K/6000K)				
	Ingress Protection (IP)				
IP20					
IP20/IP67					
Lumens/m		-	-	-	
Tunable White	19.2W/m (19)		38.4W/m (38)	23W/m (23)	
	CCT				
	2500K-6000K				
	Ingress Protection (IP)				
IP20		IP20	IP20	IP20	
CRI>					
90		90	90		
Lumens/m		1680	3360	1680	


* LED option has an on-board constant controller IC with inbuilt temperature control.

Photometrics

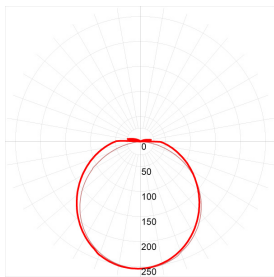

Accessories

Mounting Bracket



Code

Example: V1616CR - S059027ODD079 - 2500

Code		Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V1616CR	V1616CR, IP20	S Surface Mounted	05 4.8W/m 10 9.6W/m 14 14.4W/m 15 14.4W/m 19 19.2W/m 20 19.2W/m 23 23W/m 30 30W/m 38 38.4W/m	90 CRI>90 95 CRI>95	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 65 6500K TW 2500K-6000K RGB RGB RGBW3K RGBW 3000K RGBW4K RGBW 4000K RGBW6K RGBW 6000K	OD Opal	D0 Non-Dim DA DALI D4 DALI RGBW SW Switch-Dim CA Casambi C4 Casambi (TW/ RGB/RGBW) T2 Tunable White (DALI/)	10 Black 11 White 79 Natural Anodised CU Custom	- XXXX

FOS Lighting reserve the right to change any data without notification