


Key Features


| | | | |
|-----------------|--|--------------------|---|
| Optical Systems | Opal Diffused | CCT | 2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW |
| Mounting Type | Surface Mounted | Controls | Non Dimming DALI Dimming Switch Dimming Casambi |
| Finish Options | Textura Black Textura White Natural Anodised Custom colours available by request | Power Supply | Remote |
| System Warranty | 5 Years | Wattage | 4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 30W/m 38.4W/m |
| CRI | >90 (Standard) >95 (Optional) | Ingress Protection | IP20 |

Finish colour options

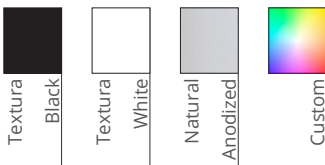


Installation Types

Surface Mounted (S)




Configurations

Standard Length

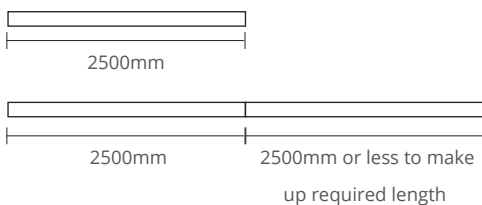

Angle




Technical Information

| | 4.8W/m (5) | 9.6W/m (10) | 14.4W/m (15) | 19.2W/m (20) |
|----------------------|---|-------------|--------------|--------------|
| Monochrome | CCT 2700K / 3000K / 3500K / 4000K / 5000K / 6500K | | | |
| | Ingress Protection (IP) IP20/IP67 | | | |
| | CRI> 90 / 95 | | | |
| | Lumens/m (4000K) | 425 | 850 | 1275 |
| RGB & SINGLE COLOURS | 14.4W/m (14) | | | |
| | CCT RGB / Red / Green / Blue / Yellow | | | |
| | Ingress Protection (IP) IP20/IP67 | | | |
| | CRI> - | | | |
| RGBW | 19.2W/m (19) * | | | |
| | CCT RGBW (3000K/4000K/6000K) | | | |
| | Ingress Protection (IP) IP20/IP67 | | | |
| | Lumens/m - | | | |
| Tunable White | 19.2W/m (19) | | | |
| | CCT 2500K-6000K | | | |
| | Ingress Protection (IP) IP20/IP67 | | | |
| | Lumens/m 1680 | | | |


* LED option has an on-board constant controller IC with inbuilt temperature control.

Photometrics

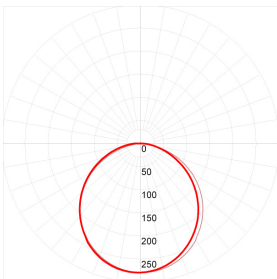

Accessories

Mounting Bracket



Code

Example: V1809 - S059027ODD079 - 2500

| Code | | Mounting | Power | | CRI | | CCT | | Optics | | Driver | | Finish | | Length |
|-------|-------|-------------------|-------|---------|-----|--------|--------|-------------|--------|------|--------|------------------------|--------|------------------|--------|
| V1809 | V1809 | S Surface Mounted | 05 | 4.8W/m | 90 | CRI>90 | 27 | 2700K | OD | Opal | D0 | Non-Dim | 10 | Black | - XXXX |
| | | | 10 | 9.6W/m | 95 | CRI>95 | 30 | 3000K | | | DA | DALI | 11 | White | |
| | | | 14 | 14.4W/m | | | 35 | 3500K | | | D4 | DALI RGBW | 79 | Natural Anodised | |
| | | | 15 | 14.4W/m | | | 40 | 4000K | | | SW | Switch-Dim | CU | Custom | |
| | | | 19 | 19.2W/m | | | 50 | 5000K | | | CA | Casambi | | | |
| | | | 20 | 19.2W/m | | | 65 | 6500K | | | C4 | Casambi (TW/ RGB/RGBW) | | | |
| | | | 23 | 23W/m | | | TW | 2500K-6000K | | | | Tunable White (DALI/) | | | |
| | | | 30 | 30W/m | | | RGB | RGB | | | T2 | | | | |
| | | | 38 | 38.4W/m | | | RGBW3K | RGBW 3000K | | | | | | | |
| | | | | | | | RGBW4K | RGBW 4000K | | | | | | | |
| | | | | | | | RGBW6K | RGBW 6000K | | | | | | | |

FOS Lighting reserve the right to change any data without notification