

VEKTA VVB0715



Key Features

- 50mm bend diameter
- Vertical Bending
- Solvent Resistant
- Dirt Resistant
- Remote 24V Driver
- Maximum length 10m (RGBW IS 8m)
- Other colours available on request
- Maximum length 10m (Mono, Tunable White, RGB)
- Maximum length 8m (RGBW)
- 100mm Cut length

Compliance



Code

Example:


VVB0715-S108022DED0-2400

Profile	Mounting	Power	CRI	CCT	Connector	Driver	Length
VVB0715	S - Surface Mount	10 - 10W/m (970lm/m)* 12 - 12W/M (408lm/m) (ONLY RGB) 15 - 15W/m (1329 lm/m)** (ONLY TW) 17 - 17W/m (758 lm/m)* (ONLY RGBW)	80 - CRI>80 90 - CRI>90***	22 - 2200K 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 65 - 6500K TW - Tunable White (2700K-5700K) RE - Red GR - Green BL - Blue RGB RGBW	DE - Direct SE - Side entry BE - Bottom JU - Jumper	DO - Non-Dim DA - Dali-Dim SW - Switch-Dim CA - Casambi	- XXXX mm


* Based on CRI>80 and 4000K **Based on CRI>80 ***MOQ on CRI>90

Mounting


Surface Mounted (S)




Flex Direction



Mounting Channel




Dimensions



* Mounting Clip image is for reference and may change from strip to strip.

CONNECTOR OPTIONS


Direct Entry (DE)

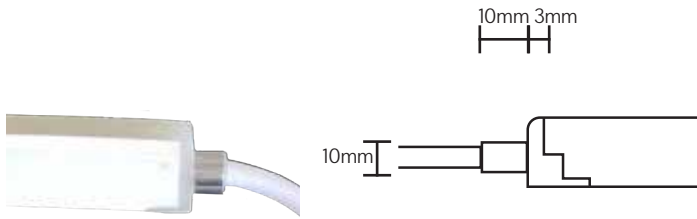

COMPATIBLE MODULES

VVB1010	VVB1221
VHB1010	VHB1229
VVB1717	VVB1414
VHB1717	VHB0817
VVB1717F	VVB0714


Side Entry (SE)

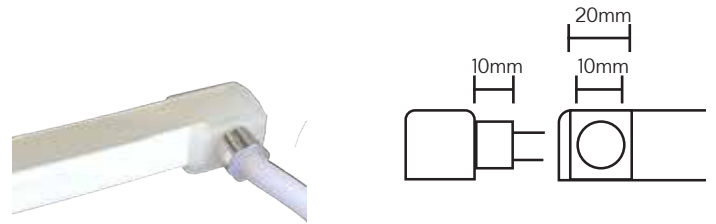

COMPATIBLE MODULES

VVB1010	VVB1221
VHB1010	VHB1229
VVB1717	VVB1414
VHB1717	VHB0817
VVB1717F	VVB0714


Bottom Entry (BE)

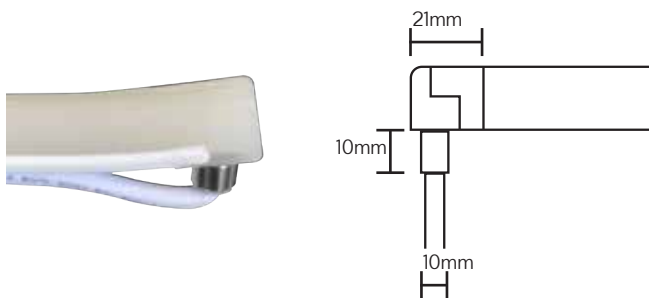

COMPATIBLE MODULES

VVB1010	VVB1221
VHB1010	VHB1229
VVB1717	VVB1414
VHB1717	VHB0817
VVB1717F	VVB0714

L Shape Entry (LE)

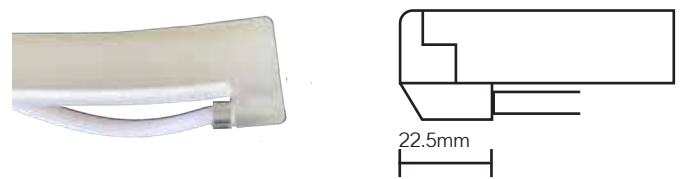

COMPATIBLE MODULES

VVB1717
VVB1717F
VVB1221
VHB1229