


Key Features

Optical Systems	Opal Diffused	CCT	2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW
Mounting Type	Wire Suspended	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Natural Anodised Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 30W/m 38.4W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20 IP67 ¹


1. IP67 is achieved by using IP67 LED Tape.

Finish colour options



Installation Types



Wire Pendant (P) Up/Down Wire (U)

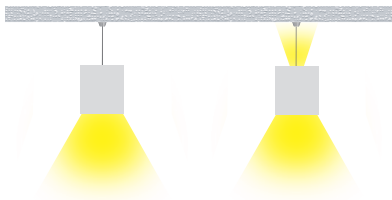

Configurations

Standard Length

Angle

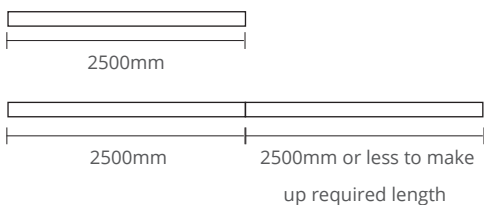


Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	
Monochrome	CCT				
	2700K / 3000K / 3500K / 4000K / 5000K / 6500K				
	Ingress Protection (IP)				
	IP20/IP67				
CRI>					
90 / 95					
Lumens/m (4000K)		425	850	1275	1700
RGB & SINGLE COLOURS	14.4W/m (14)				
	CCT				
	RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP)				
IP20/IP67					
CRI>					
-					
Lumens/m		350-410 (RGB)			
RGBW	19.2W/m (19) *		23W/m (23)	30W/m (30)	19.2W/m (20)
	CCT				
	RGBW (3000K/4000K/6000K)				
	Ingress Protection (IP)				
IP20/IP67					
Lumens/m					
-					
Tunable White	19.2W/m (19)		38.4W/m (38)	23W/m (23)	
	CCT				
	2500K-6000K				
	Ingress Protection (IP)				
IP20/IP67		IP20	IP20/IP67		
CRI>					
90		90	90		
Lumens/m		1680	3360	1680	


* LED option has an on-board constant controller IC with inbuilt temperature control.

Photometrics


Direct

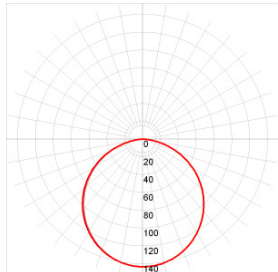

Indirect

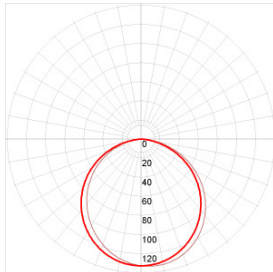


Direct/Indirect

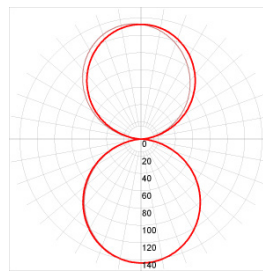

Accessories

Wire Suspension



Code

Example: V3550 - U050590270DD079 - 2500

Code		Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length
V3550	V3550, IP20	P	05	90	27	OD	D0	10	-XXXX
V3550IP	V3550, IP67	U	10	95	30	Opal	DA	11	
			14		35		D4	79	
			15		40		SW	CU	
			19		50		CA		
			20		65		C4		
			23		TW				
			30		RGB		T2		
			38		RGBW3K				
					RGBW4K				
					RGBW6K				
					2700K		Non-Dim		
					3000K		DALI		
					3500K		DALI RGBW		
					4000K		Switch-Dim		
					5000K		Casambi		
					6500K		Casambi (TW/		
					2500K-6000K		RGB/RGBW)		
					RGB		Tunable White		
					RGBW 3000K		(DALI/)		
					RGBW 4000K				
					RGBW 6000K				

FOS Lighting reserve the right to change any data without notification