


Key Features

Optical Systems	Opal Diffused	CCT	2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW
Mounting Type	Surface Mounted Wire Suspended	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Natural Anodised Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 28.8W/m 30W/m 38.4W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20 IP67 ¹


1. IP67 is achieved by using IP67 LED Tape.

Finish colour options

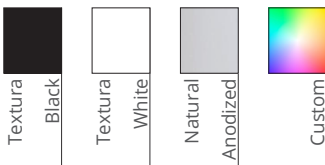


Installation Types

Surface Mounted (S) | Wire Pendant (P)

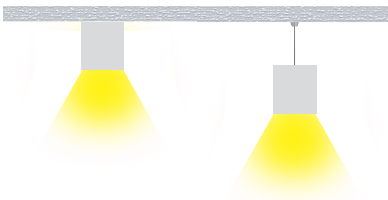


Configurations

Standard Length

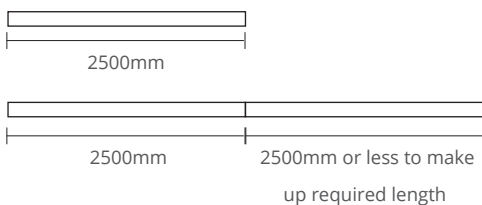

Angle




Technical Information

		4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	28.8W/m (29) ²	
Monochrome	CCT	2700K / 3000K / 3500K / 4000K / 5000K / 6500K					
	Ingress Protection (IP)	IP20/IP67					
	CRI>	90 / 95					
	Lumens/m (4000K)	425	850	1275	1700	2700	
RGB & SINGLE COLOURS	14.4W/m (14)						
	CCT	RGB / Red / Green / Blue / Yellow					
	Ingress Protection (IP)	IP20/IP67					
	CRI>	-					
Lumens/m	350-410 (RGB)						
RGBW	19.2W/m (19) *		23W/m (23)		30W/m (30)		
	CCT	RGBW (3000K/4000K/6000K)				RGBW (3000K/4000K)	
	Ingress Protection (IP)	IP20/IP67				IP20/IP67	
Lumens/m	-		-		-		
Tunable White	19.2W/m (19)		38.4W/m (38)		23W/m (23)		
	CCT	2500K-6000K				2500K-6000K	
	Ingress Protection (IP)	IP20/IP67		IP20		IP20/IP67	
	CRI>	90		90		90	
Lumens/m	1680		3360		1680		


* LED option has an on-board constant controller IC with inbuilt temperature control. 2 - IP67 28.8W/m is not possible within this profile

Photometrics

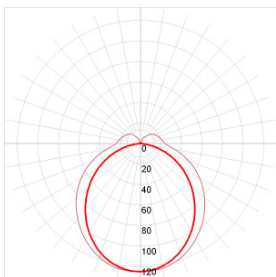

Accessories

Wire Suspension



Code

Example: V3640 - S059027ODD079 - 2500

Code		Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length
V3640	V3640, IP20	S	Surface Mounted	05	4.8W/m	90	CRI>90	27	2700K	OD	Opal	D0	Non-Dim	10	Black	- XXXX
V3640/IP	V3640, IP65	P	Pendant (Wire, Direct)	10	9.6W/m	95	CRI>95	30	3000K			DA	DALI	11	White	
				14	14.4W/m			35	3500K			D4	DALI RGBW	79	Natural Anodised	
				15	14.4W/m			40	4000K			SW	Switch-Dim	CU	Custom	
				19	19.2W/m			50	5000K			CA	Casambi			
				20	19.2W/m			65	6500K			C4	Casambi (TW/ RGB/RGBW)			
				23	23W/m			TW	2500K-6000K			T2	Tunable White (DALI/)			
				29	28.8W/m			RGB	RGB							
				30	30W/m			RGBW3K	RGBW 3000K							
				30	30W/m			RGBW4K	RGBW 4000K							
				38	38.4W/m			RGBW6K	RGBW 6000K							

FOS Lighting reserve the right to change any data without notification