


## Key Features


Optical Systems	Clear Lens	CCT	2700K   3000K   3500K   4000K   5000K   6500K   Tunable White 2500-6500K   RGB   RGBW
Mounting Type	Surface Mounted	Controls	Non Dimming   DALI Dimming   Switch Dimming   Casambi
Finish Options	Textura Black   Textura White   Natural Anodised   Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m   9.6W/m   14.4W/m   19.2W/m   23W/m   30W/m   38.4W/m
CRI	>90 (Standard)   >95 (Optional)	Ingress Protection	IP20

## Finish colour options

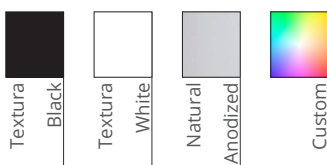


## Installation Types

Surface Mounted (S)




## Configurations

Standard Length

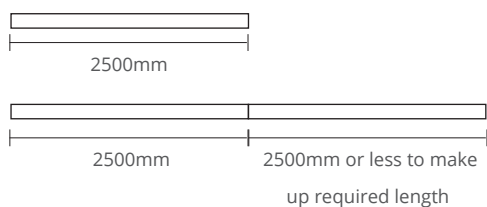

Angle




## Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)
Monochrome	CCT 2700K / 3000K / 3500K / 4000K / 5000K / 6500K			
	Ingress Protection (IP) IP20			
	CRI> 90 / 95			
	Lumens/m (4000K)	425	850	1275
COLOURS	14.4W/m (14)			
	CCT RGB / Red / Green / Blue / Yellow			
	Ingress Protection (IP) IP20			
	CRI> -			
RGBW	19.2W/m (19) *			
	CCT RGBW (3000K/4000K/6000K)			
	Ingress Protection (IP) IP20			
	Lumens/m -			
Tunable White	19.2W/m (19)			
	CCT 2500K-6000K			
	Ingress Protection (IP)	IP20	IP20	IP20
	Lumens/m	1680	3360	1680


\* LED option has an on-board constant controller IC with inbuilt temperature control.

## Photometrics

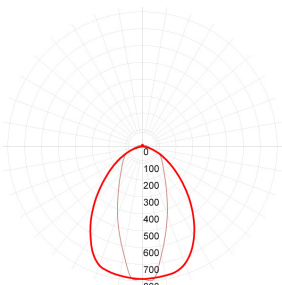

## Accessories

### Mounting Bracket



## Code

Example: V1819 - S05902710D079 - 2500

Code		Mounting	Power		CRI		CCT		Optics		Driver		Finish		Length
V1819	V1819	S Surface Mounted	05	4.8W/m	90	CRI>90	27	2700K	10	10°	D0	Non-Dim	10	Black	-XXXX
			10	9.6W/m	95	CRI>95	30	3000K	20	20°	DA	DALI	11	White	
			14	14.4W/m			35	3500K	30	30°	D4	DALI RGBW	79	Natural Anodised	
			15	14.4W/m			40	4000K	60	60°	SW	Switch-Dim	CU	Custom	
			19	19.2W/m			50	5000K	90	90°	CA	Casambi			
			20	19.2W/m			65	6500K			C4	Casambi (TW/ RGB/RGBW)			
			23	23W/m			TW	2500K-6000K			T2	Tunable White (DALI/)			
			30	30W/m			RGB	RGB							
			38	38.4W/m			RGBW3K	RGBW 3000K							
							RGBW4K	RGBW 4000K							
							RGBW6K	RGBW 6000K							

# FOS Lighting reserve the right to change any data without notification