




Key Features


Optical Systems	Opal Diffused	CCT	2700K 3000K 4000K
Mounting Type	Surface Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Natural Anodised Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	7.2W/m 12W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20

Finish colour options




Installation Types

Surface Mounted (S)




Configurations

Standard Length

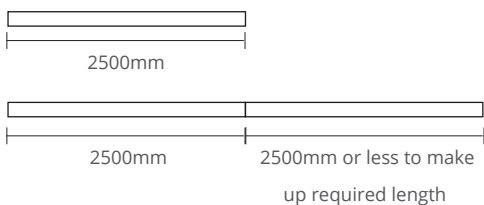


Angle



Technical Information


Monochrome	7.2W/m (07)		12W/m (12)		
	CCT	2700K / 3000K / 4000K			
	Ingress Protection (IP)	IP20			
	CRI>	90 / 95			
	Lumens/m (4000K)	309		515	

Photometrics

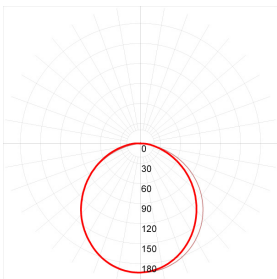

Accessories

Mounting Bracket



Code

Example: V0809 - S0590270DD079 - 2500

Code		Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length
V0809	V0809, IP20	S	Surface Mounted	07	7.2W/m	90	CRI>90	27	2700K	OD	Opal	DO	Non-Dim	10	Black	-XXXX
				12	12W/m	95	CRI>95	30	3000K			DA	DALI	11	White	
								40	4000K			SW	Switch-Dim	79	Natural Anodised	
												CA	Casambi	CU	Custom	