



V60100

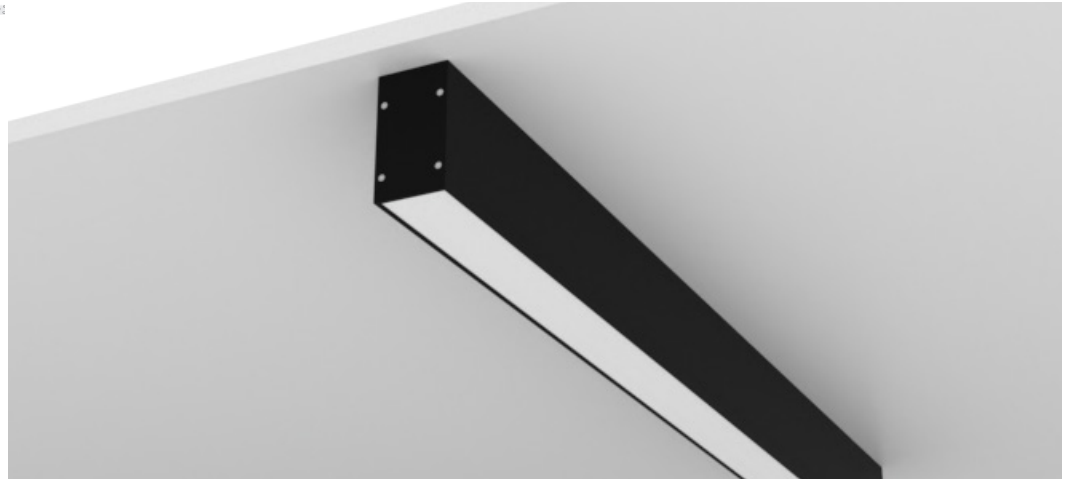


Cyanosis compliant on request

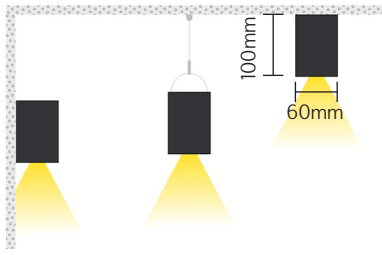


Key Features

Optical Systems	Opal Diffused	CCT	3000K 3500K 4000K 5000K Tunable White 2700-6500K
Mounting Type	Surface Mounted Wire Pendant Rod Pendant Recessed Trimless Wall Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Anodic Natural Matt Custom colours available by request	Power Supply	Integral
System Warranty	5 Years	Wattage	12W/m 16W/m 20W/m 24W/m 28W/m 32W/m 36W/m 40W/m
CRI	CRI >80 CRI >90	Ingress Protection	IP20

Finish colour options




Installation Types

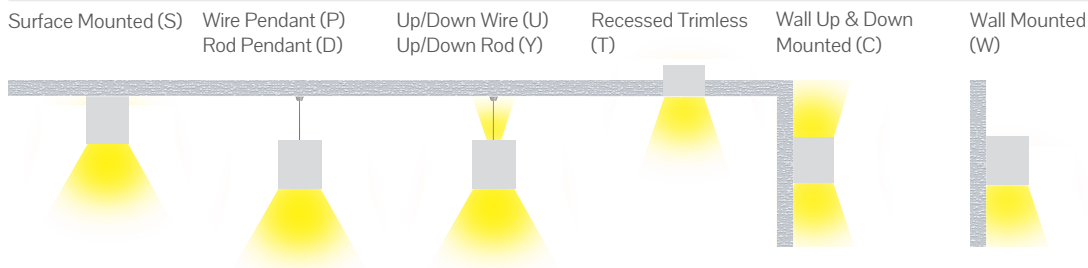

Configurations

Standard Length

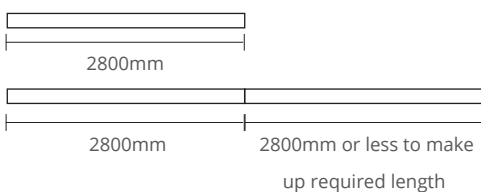

Angle




*Standard Lengths do not include Endcaps, and is only referencing extrusion length.

Technical Information


	12W/m	16W/m	20W/m	24W/m	28W/m	32W/m	36W/m	40W/m
4000K	1008lm/m	1344lm/m	1680lm/m	2016lm/m	2352lm/m	2688lm/m	3024lm/m	3360lm/m

Lumens values based on Opal, 4000K, CRI>90



Photometrics

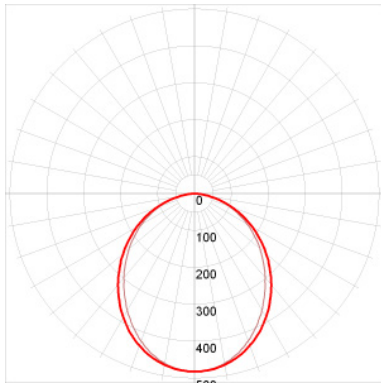

Data values reflect Opal Diffused

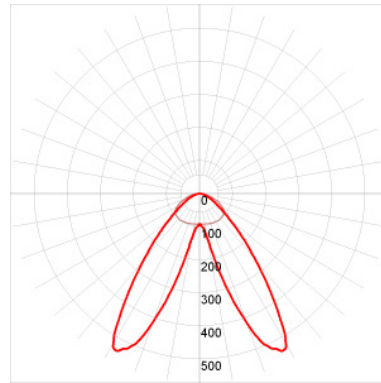


Data values reflect Double Asymmetric

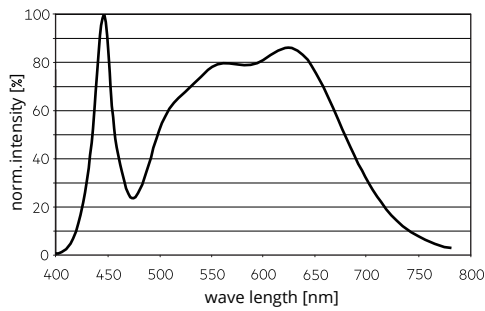

*Mapped CRI data was sourced from LED Manufacturers Data sheets, data shown is based on the LED boards not the luminaire

Accessories

Louvers



Order ID	Description	Beam Angle
B3	Black Narrow Beam	35°
B5	Black Medium Beam	50°
B8	Black Wide Beam	80°
B0	Black Oval Beam	20° x 70°
BA	Black Asymmetric	Asymmetric
BW	Black Batwing	Batwing

Order ID	Description	Beam Angle
W3	White Narrow Beam	35°
W5	White Medium Beam	50°
W8	White Wide Beam	80°
W0	White Oval Beam	20° x 70°
WA	White Asymmetric	Asymmetric
WB	White Batwing	Batwing