


## Key Features

Optical Systems	Opal Diffused	CCT	2700K   3000K   3500K   4000K   5000K   6500K   Tunable White 2500-6500K   RGB   RGBW
Mounting Type	Surface Mounted   Wire Suspended	Controls	Non Dimming   DALI Dimming   Switch Dimming   Casambi
Finish Options	Textura Black   Textura White   Natural Anodised   Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m   9.6W/m   14.4W/m   19.2W/m   23W/m   28.8W/m   30W/m   38.4W/m
CRI	>90 (Standard)   >95 (Optional)	Ingress Protection	IP20   IP67 <sup>1</sup>


1. IP67 is achieved by using IP67 LED Tape.

## Finish colour options




## Installation Types

Surface Mounted (S) | Wire Pendant (P)

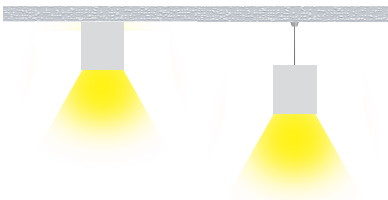


## Configurations

Standard Length

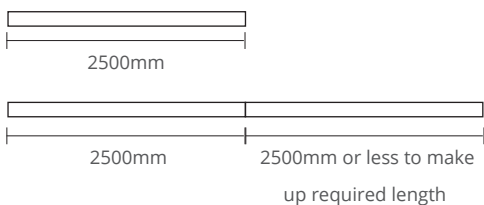

Angle




## Technical Information

	4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)	28.8W/m (29) <sup>2</sup>
Monochrome	CCT 2700K / 3000K / 3500K / 4000K / 5000K / 6500K				
	Ingress Protection (IP) IP20/IP67				
	CRI> 90 / 95				
	Lumens/m (4000K)	425	850	1275	1700
RGB & SINGLE COLOURS	14.4W/m (14)				
	CCT RGB / Red / Green / Blue / Yellow				
	Ingress Protection (IP) IP20/IP67				
	CRI> -				
RGBW	19.2W/m (19)*		23W/m (23)	30W/m (30)	19.2W/m (20)
	CCT RGBW (3000K/4000K/6000K) RGBW (3000K/4000K)				
	Ingress Protection (IP) IP20/IP67 IP20/IP67				
	Lumens/m - - -				
Tunable White	19.2W/m (19)		38.4W/m (38)	23W/m (23)	
	CCT 2500K-6000K 2500K-6000K				
	Ingress Protection (IP) IP20/IP67		IP20	IP20/IP67	
	CRI> 90		90	90	
Lumens/m 1680		3360		1680	


\* LED option has an on-board constant controller IC with inbuilt temperature control. 2 - IP67 28.8W/m is not possible within this profile

## Photometrics

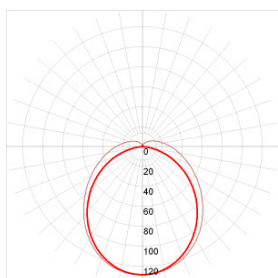

## Accessories

### Wire Suspension



## Code

Example: V - S059027ODD079 - 2500

Code		Mounting		Power		CRI		CCT		Optics		Driver		Finish		Length
V3640D	V3640D, IP20	S	Surface Mounted	05	4.8W/m	90	CRI>90	27	2700K	OD	Opal	D0	Non-Dim	10	Black	-XXXX
V3640DIP	V3640D, IP65	P	Pendant (Wire, Direct)	10	9.6W/m	95	CRI>95	30	3000K			DA	DALI	11	White	
				14	14.4W/m			35	3500K			D4	DALI RGBW	79	Natural Anodised	
				15	14.4W/m			40	4000K			SW	Switch-Dim	CU	Custom	
				19	19.2W/m			50	5000K			CA	Casambi			
				20	19.2W/m			65	6500K			C4	Casambi (TW/ RGB/RGBW)			
				23	23W/m			TW	2500K-6000K			T2	Tunable White (DALI/)			
				29	28.8W/m			RGB	RGB							
				30	30W/m			RGBW3K	RGBW 3000K							
				38	38.4W/m			RGBW4K	RGBW 4000K							
								RGBW6K	RGBW 6000K							

# FOS Lighting reserve the right to change any data without notification