

Key Features

Bending direction & Minimum bend diameter	Horizontal, 150mm	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Protection	IP68 IK08	Power Supply	Remote Driver
System Warranty	5 Years	Power length	600mm
CRI	CRI >80 CRI >90 ¹	Wattage	5W/m 10W /m
CCT	2200K 2700K 3000K 3500K 4000K 4500K 5000K 6500K Single Coloured		


1. MOQ Required

Technical Information

	Monochrome Colours	
	5W/m	10W/m
4000K	245lm/m	480lm/m
Max Run Length	10m	5m
Incremental Order Length (mm)	16.67mm	100mm


Lumens values based on 4000K, CRI>80

Photometrics

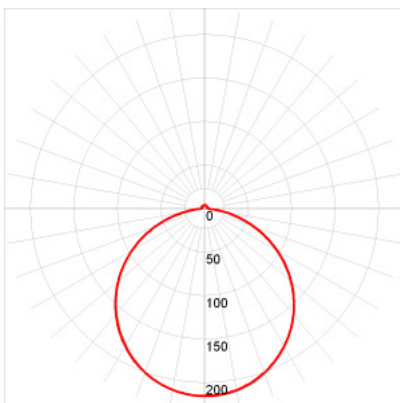


Data values reflect VHB1010, CRI>80, 10w/m, 4000K

Finish colour options

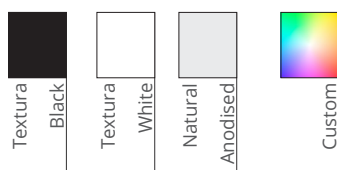

Installation Types

Surface Mounted (S)







Power Locations

Direct Entry

Side Entry Right

Side Entry Left

Bottom Entry



Accessories






Mounting Channel Standard

Mounting Channel Flexible

Mounting Channel Anti-Drop

Mounting Channel Anti-Drop Recessed

Mounting Channel Transparent Plastic



Code

Example:

VHB1010-S-10-80-22-DE-D0-10-3360

Code	Mounting	Power	CRI	CCT	Connector	Driver	Length
VHB1010	S Surface Mounted	05 5W/m 10 10W/m	80 90	22 2200K 27 2700K 30 3000K 35 3500K 40 4000K 45 4500K 50 5000K 65 6500K	DE Direct Entry SL Side Entry Left SR Side Entry Right BE Bottom Entry	D0 Non-Dim DA DALI SW Switch-Dim CA Casambi	- XXXX

FOS Lighting reserve the right to change any data without notification