


Key Features

Optical Systems	Opal Diffused	CCT	2700K 3000K 3500K 4000K 5000K 6500K Tunable White 2500-6500K RGB RGBW
Mounting Type	Surface Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Natural Anodised Custom colours available by request	Power Supply	Remote
System Warranty	5 Years	Wattage	4.8W/m 9.6W/m 14.4W/m 19.2W/m 23W/m 30W/m 38.4W/m
CRI	>90 (Standard) >95 (Optional)	Ingress Protection	IP20 IP67 ¹


1. IP67 is achieved by using IP67 LED Tape.

Finish colour options




Installation Types

Surface Mounted (S)




Configurations

Standard Length

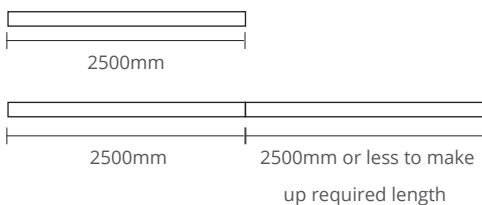

Angle




Technical Information

		4.8W/m (5)	9.6W/m (10)	14.4W/m (15)	19.2W/m (20)
Monochrome	CCT	2700K / 3000K / 3500K / 4000K / 5000K / 6500K			
	Ingress Protection (IP)	IP20/IP67			
	CRI>	90 / 95			
	Lumens/m (4000K)	425	850	1275	1700
		14.4W/m (14)			
RGB & SINGLE COLOURS	CCT	RGB / Red / Green / Blue / Yellow			
	Ingress Protection (IP)	IP20/IP67			
	CRI>	-			
	Lumens/m	350-410 (RGB)			
		19.2W/m (19) *	23W/m (23)	30W/m (30)	19.2W/m (20)
RGBW	CCT	RGBW (3000K/4000K/6000K)			RGBW (3000K/4000K)
	Ingress Protection (IP)	IP20/IP67			IP20/IP67
	Lumens/m	-	-	-	-
		19.2W/m (19)	38.4W/m (38)	23W/m (23)	
Tunable White	CCT	2500K-6000K		2500K-6000K	
	Ingress Protection (IP)	IP20/IP67	IP20	IP20/IP67	
	CRI>	90	90	90	
	Lumens/m	1680	3360	1680	


* LED option has an on-board constant controller IC with inbuilt temperature control.

Photometrics

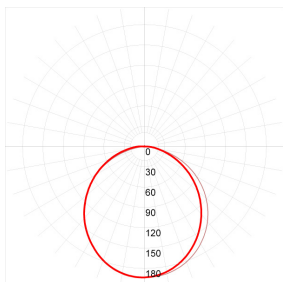

Accessories

Mounting Bracket



Code

Example: V2215 - S0890270DD079 - 2500

Code		Mounting	Power		CRI		CCT		Optics		Driver		Finish		Length
V2215	V2215, IP20	S Surface Mounted	5	4.8W/m	90 95	CRI>90 CRI>95	27	2700K	OD	Opal	D0 DA D4 SW CA C4 T2	Non-Dim DALI DALI RGBW Switch-Dim Casambi Casambi (TW/ RGB/RGBW) Tunable White (DALI/)	10 11 79 CU	Black White Natural Anodised Custom	- XXXX
V2215IP	V2215, IP67		10	9.6W/m			30	3000K							
			14	14.4W/m			35	3500K							
			15	14.4W/m			40	4000K							
			19	19.2W/m			50	5000K							
			20	19.2W/m			65	6500K							
			23	23W/m			TW	2500K-6000K							
			30	30W/m			RGB	RGB							
			38	38.4W/m			RGBW3K	RGBW 3000K							
							RGBW4K	RGBW 4000K							
				RGBW6K	RGBW 6000K										

FOS Lighting reserve the right to change any data without notification