





Cyanosis compliant on request

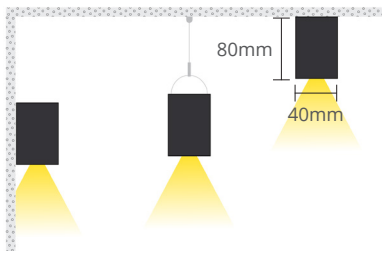


Key Features

Optical Systems	Opal Diffused	CCT	3000K 3500K 4000K 5000K Tunable White 2700-6500K
Mounting Type	Surface Mounted Wire Pendant Rod Pendant Recessed Trimless Wall Mounted	Controls	Non Dimming DALI Dimming Switch Dimming Casambi
Finish Options	Textura Black Textura White Anodic Natural Matt Custom colours available by request	Power Supply	Integral
System Warranty	5 Years	Wattage	12W/m 16W/m 20W/m 24W/m 28W/m 32W/m 36W/m 40W/m
CRI	CRI >80 CRI >90	Ingress Protection	IP20

Finish colour options




Installation Types

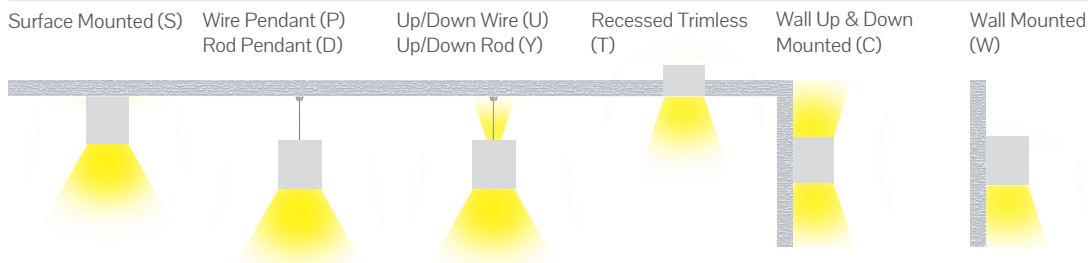

Configurations

Standard Length

Angle

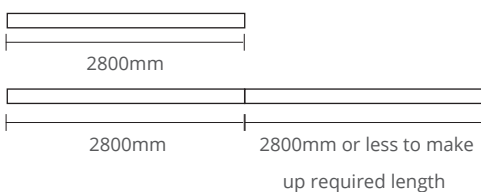




*Standard Lengths do not include Endcaps, and is only referencing extrusion length.

Technical Information

	12W/m	16W/m	20W/m	24W/m	28W/m	32W/m	36W/m	40W/m
4000K	912lm/m	1216lm/m	1520lm/m	1824lm/m	2128lm/m	2432lm/m	2736lm/m	3040lm/m

Lumens values based on Opal, 4000K, CRI>90


Photometrics

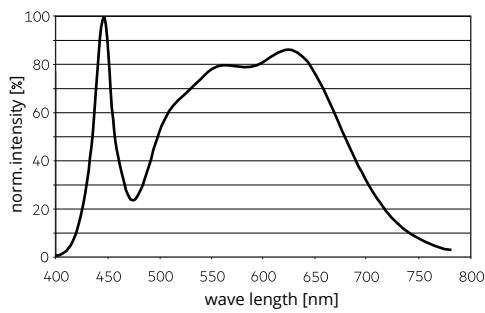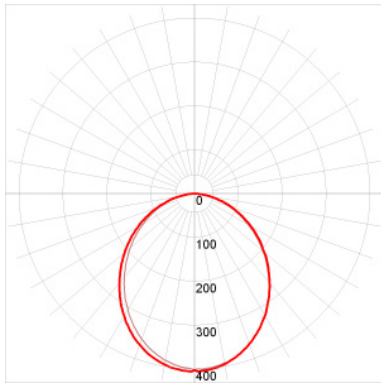

*Mapped CRI data was sourced from LED Manufactureres Data sheets, data shown is based on the LED boards not the luminaire

Accessories

Wire Suspension



Code

Example: V4080-S-12-90-40-OD-D0-10-3360

Code	Mounting	Power	CRI	CCT	Optics	Driver	Finish	Length							
V4080	S	Surface Mounted	12	12 W/m	80	CRI>80	30	3000K	OD	Opal	D0	Non-Dim	10	Black	- XXXX
	P	Wire Pendant (Direct)	16	16 W/m	90	CRI>90	35	3500K					11	White	
	D	Rod Pendant (Direct)	20	20 W/m			40	4000K	75	Anodic Natural					
	U	Wire Pendant (Direct/Indirect)	24	24 W/m			50	5000K	CU	Matt					
			28	28 W/m			65	6500K							
	Y	Rod Pendant (Direct/Indirect)	32	32 W/m			TW	2700K - 6000K		Custom					
			36	36 W/m											
	W	Wall Mounted (Direct)	40	40 W/m											
	C	Wall Mounted (Direct/Indirect)													