

RA-LED


RIGHT ANGLED REFLECTOR BATTEN



Key Features

- Squareline batten range fabricated from 0.7mm Zincseal Steel with white powder coated finish.
- Steel reflector with white powder coated finish.
- Available in 1.0mm Aluminium body for marine/corrosive environment.
- Suitable for fixing directly to ceiling or may be suspended with chains or rods.
- Ideal for blackboard/whiteboard lighting in teaching areas.
- Available in DALI Dim or Switch Dim.
- L80 B10.
- Rated 70,000 hours.
- CRI>80.

Dimensions

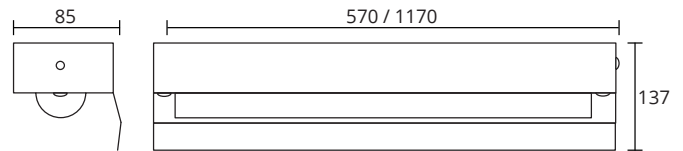

Technical Information

Number of Boards	Possible Configurations	Combined Board Output (lm)	Nominal Lengths (mm)
1	1x08W	1220	570
2	2x08W	2440	1170
1	1x14W	2200	570
2	2x14W	4400	1170

Code

RA-LED/2X08/12/40/ND

Product Series		# of Boards		Wattage (W)		Nominal Dimensions		CCT		Driver	
RA-LED	Steel Body	1	1 Board	08	8 Watts	6	600mm	30	3000K	ND	Non Dim
RAAL-LED	Aluminium Body	2	2 Board	14	14 Watts	12	1200mm	40	4000K	DALI SD	DALI Dim Switch Dim

See Technical Information Table for configurations options
Specifications subject to change without notice